

## Item Code and Description

- a. CD1222-ORB
- b. TrueDEK Classic Drain, grid pattern, in stainless steel with oil-rubbed bronze finish

## General Product Description

- a. drain assembly for tiled showers
- b. fits TrueDEK Classic shower foundations
- c. includes drain assembly, drain connector, and drain gasket

## Physical Characteristics

- a. grate and frame made of SAE grade 304 stainless steel
- b. adaptor, clamping ring, and height adjustment collar made of ABS plastic
- c. installation hardware is stainless steel (included)
  - i. bolts for securing clamping ring: flat head, .70 pitch, 4mm x 15mm stainless steel (quantity of 2)
  - ii. screws for securing adapter to base: flat head, #8 x 3/4" stainless steel (quantity of 4)
- d. includes a leverage key for removing grate
- e. height adjustment collar allows adjustment of grate
- f. grate measures 3/16" x 47/16" x 47/16"
- g. kit includes shower drain connector (Sioux Chief model 825 in PVC)
- h. kit includes fabric drain gasket

## Performance Characteristics

- a. adjust elevation of grate and frame to match tile 1/4" to 1" in thickness
- b. weepage provides secondary drainage
- c. drain connector clamps to bottom flange of adaptor
- d. solvent weld drain connector to 2" dia. drain line for a leak-free transition
- e. suitable for a maximum water flow rate of 6 gallons/minute; consult a professional plumber for an accurate calculation of drainage requirements and waste rate; a typical shower head produces 1.5 to 2.5 gallons/minute
- f. clamping ring engages drain gasket to complete a mechanical waterproofing connection that covers drain assembly joints outside of drain channel
- g. embed drain gasket to drain adaptor and shower foundation for a waterproof seal

## Compliance

- a. ICC PMG-1344 lists compliance with:
  1. 2015, 2012 and 2009 International Residential Code® (IRC)
  2. 2015, 2012 and 2009 International Plumbing Code® (IPC)
  3. 2015, 2012 and 2009 Uniform Plumbing Code® (UPC)
  4. 2010 and 2005 National Plumbing Code of Canada (NPC)
  5. ASME A112.18.2/CSA B125.2-2011, Plumbing Waste Fittings



## Other Information

- a. Nicholls & Clarke limited lifetime warranty on drain assembly
- b. Sioux Chief limited lifetime warranty on drain connector

TrueDEK® Classic Drain



Grid Pattern Drain for Tile




Drain gasket

For drain connector specifications, please see item code DC5500-PVC.



Prepare for a drain connection by cutting the drain pipe below the shower base's support structure: 27/8" for gray drain assemblies; 21/2" for white drain assemblies.

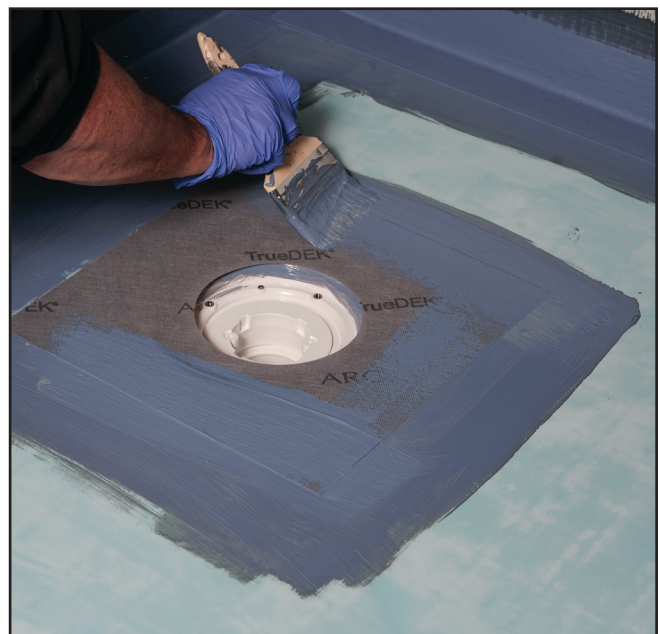

Embedding gasket over drain.